

# LINA 60 W

Stylish wall mounted linear extruded module c/w opal polycarbonate diffuser .

## Applications

- Corridors
- Stairwells
- Break-Out
- Receptions
- Lobbies
- Classrooms




## Features

- Extruded aluminium section.
- Opal UV stabilised polycarbonate diffuser
- Epoxy powder coated finish RAL 9010 as standard.
- Direct/Indirect illumination
- IK05
- IP40

## Options

- White (**WH**), Black (**BK**), Grey (**GR**) other colours available on request
- Integrated 3hr emergency -Standard (**M3**) – Self Testing (**STE**)
- Integral PIR Sensor (**PIR**) only available on fittings over 1200mm
- Micro-Prism diffuser UGR<19 (**MPO**)
- Casambi Wireless control (**BTC**)

## Dimensions

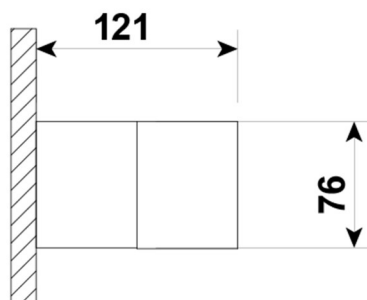

## Product Code

LIN6W-20-4K-DI-WH	LINA 60 W, 20w, 2739lm, 587mm body, finished white RAL9003
LIN6W-33-4K-DI-WH	LINA 60 W, 33w, 4565lm, 868mm body, finished white RAL9003
LIN6W-46-4K-DI-WH	LINA 60 W, 46w, 6391lm, 1149mm body, finished white RAL9003

\*\* Suffix WH to BK or GR for preferred colour

\*\* Suffix end of code for emergency facility, PIR, Wireless control, Micro-prism diffuser

Example: LIN6W-33-DI-GR-MPO

Lina 60 W finished grey c/w micro-prism diffuser