

Recessed backlit IP65 LED suitable for exposed tee 15/24mm & concealed grid ceiling.

- Classrooms
- Veterinary
- Hospitals
- Surgery
- Laboratory




Features

- Fabricated Steel Body
- Extruded Aluminium bezel
- Epoxy powder coated RAL9016
- IP65 (From Face)
- Opal Satin Diffuser 850° Glow wire test

Options

- Integrated 3hr emergency -Standard (**M3**) – Self-Testing Emergency (**STE**)
- DALI Monitored emergency (**D3**)
- DALI (**DA**)
- Casambi Wireless Control (**BTC**)

Dimensions

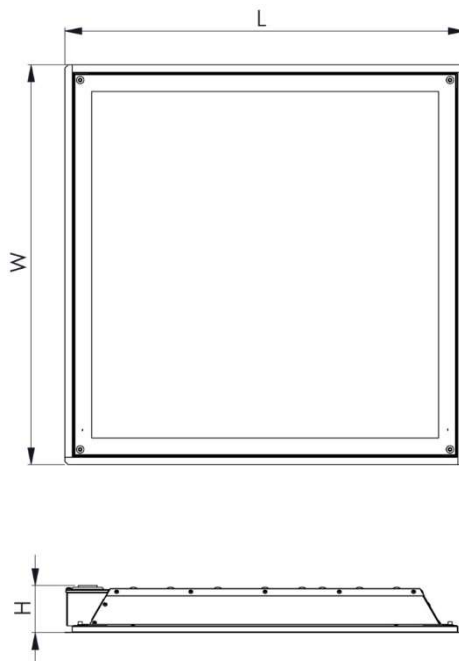

Dimensions – 'L' 595mm x 'W' 595mm x 'H' 75mm

Product Code

CLN-26-4K-65 CLINILED, 26w, 4K, 3,322lm, IP65, Opal diffuser

CLN-33-4K-65 CLINILED, 33w, 4K, 4,332lm, IP65, Opal diffuser

** Suffix end of code **(M3)** for emergency facility or **(DA)** for DALI/Switch DIM or **(BTC)** for Casambi Wireless Control

**Example: CLN-26-4K-65-DA CliniLED, 26w, 4K c/w DALI