

Surface mounted Anti-Vandal luminaire c/w anti-tamper fixings .

- Railways
- Subways
- Underground passages
- Prison
- Psychiatric Unit
- Mental Health




Features

- Fabricated sheet metal housing, fully welded construction
- Opal UV stabilised polycarbonate diffuser 850° glow wire
- Epoxy power coated RAL9016 as standard
- Stainless Steel anti-tamper fixings
- Branded LED boards & Driver
- IP65
- IK10+ Mechanical impact resistance

Options

- Integrated 3hr emergency -Standard (**M3**) – Self Testing (**STE**)
- DALI (**DA**)
- DALI Monitored emergency (**D3**)
- Microwave Sensor (**MW1**)
- Casambi Wireless Control (**BTC**)
- Custom body finishes available on request (**RAL**)

Dimensions

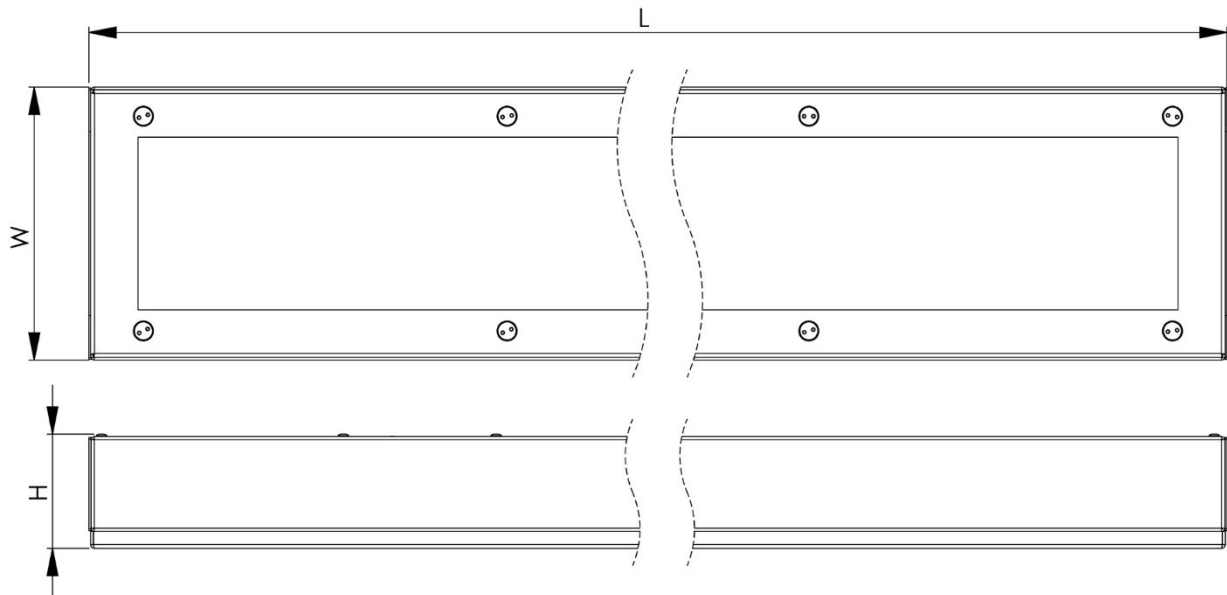

Product Code

TRS-13-4K-WH	Trend S 13w, 4K, 1,548lm, 380mm L x 150mm W x 65mm H
TRS-19-4K-WH	Trend S 19w, 4K, 2,334lm, 660mm L x 150mm W x 65mm H
TRS-28-4K-WH	Trend S 28w, 4K, 3,502lm, 940mm L x 150mm W x 65mm H
TRS-38-4K-WH	Trend S 38w, 4K, 4,668lm, 1220mm L x 150mm W x 65mm H
TRS-41-4K-WH	Trend S 55w, 4K, 5,295lm, 1500mm L x 150mm W x 65mm H

** Suffix WH to RAL for Custom body finish

** Suffix end of code (**M3**) for emergency facility or (**MW1**) for Microwave sensor

Example: TRS-38-4K-WH-M3-MW1

Trend - S c/w 3hr Emergency and Microwave sensor