


Capri – 85S

Low glare architectural LED downlight, IP44 with die-cast bezel RAL9003 dark light baffle

- Corridors
- Offices
- Toilets
- Break-Out

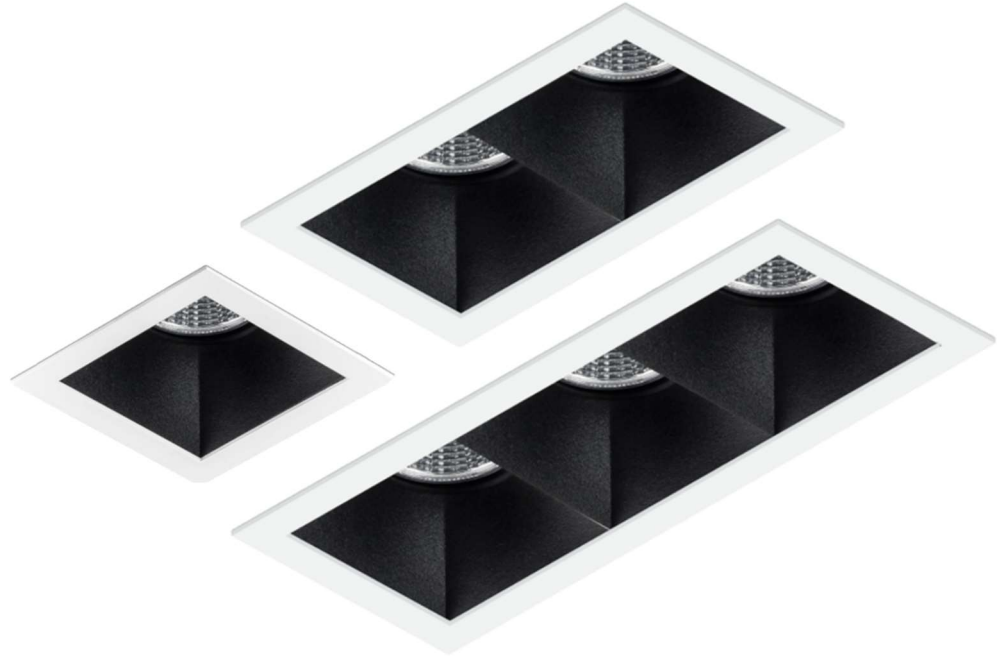

Features


- Tridonic LED and driver system for optimum performance
- Discreet minimal die-cast bezel – RAL9003 white
- Matt black darklight baffle RAL9005 IP44 protective lens as standard
- Precision moulded 40° reflector
- Life >55,000h (L90/F10)

Options

- DALI dimming – **(DA)**
- Remote 3hr emergency – **(M3)**
- Remote self-test 3hr emergency - **(STE)**
- Remote DALI monitored emergency – **(D3)**
- Casambi Wireless control – **(BTC)**
- IP54 clear cover – **(54)**
- Plaster In Bezel – **(PI)**
- White softlight baffle – **(WSB)**

Capri – 85S

Dimensions

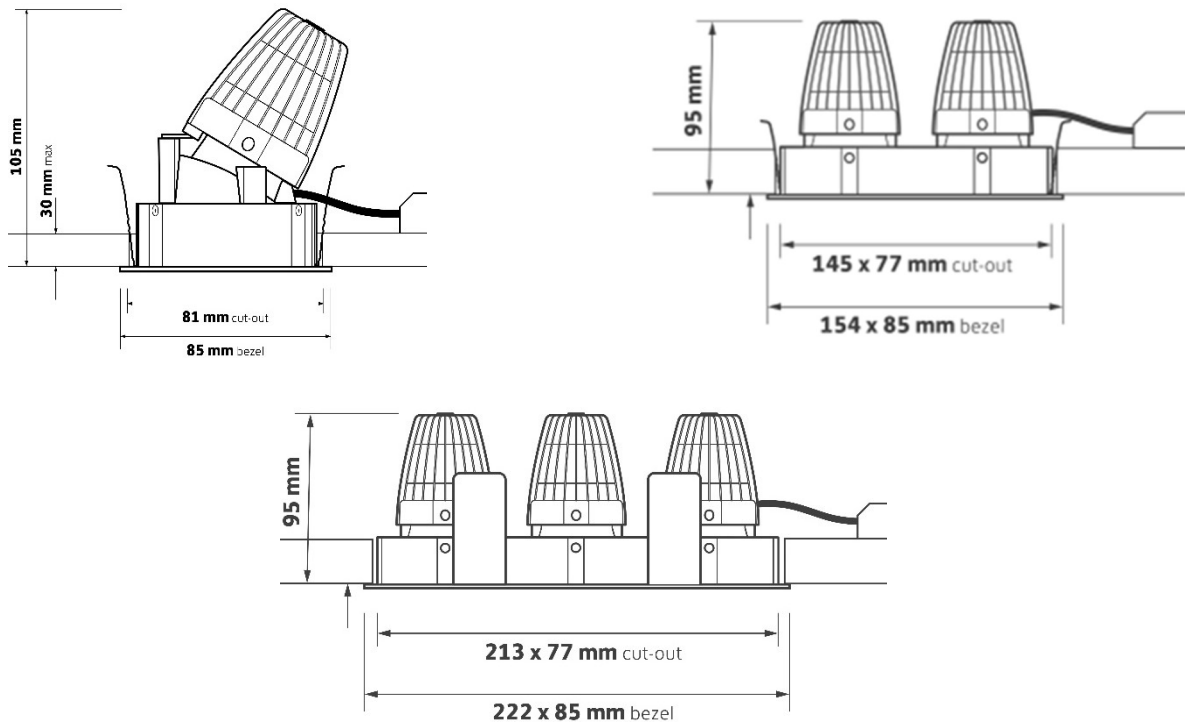

Product Code

C85S-6-4K-BK-WH	Capri 85S, 6w, 600lm, 4K, single head black baffle, white bezel
C85S-8-4K-BK-WH	Capri 85S, 8w, 950lm, 4K, single head black baffle, white bezel
C85S-13-4K-BK-WH	Capri 85S, 13w, 1,350lm, 4K, twin head black baffle, white bezel
C85S-16-4K-BK-WH	Capri 85S, 16w, 1,800lm, 4K, twin head black baffle, white bezel
C85S-19-4K-BK-WH	Capri 85S, 19w, 2,100lm, 4K, triple head black baffle, white bezel
C85S-24-4K-BK-WH	Capri 85S, 24w, 2,700lm, 4K, triple head black baffle, white bezel

**Suffix 4K to 3K for 3000 Kelvin

** Suffix BK to WH for white softlight baffle

** Example – C85S-24-4K-WH-DA

Capri 85S, 24w, 2,700lm, white softlight baffle & DALI dimming