

Capri – 150

Low glare architectural surface mounted or suspended LED downlight RAL9016 as standard

- Corridors
- Offices
- Toilets
- Break-Out



Features


- Tridonic LED and driver system for optimum performance
- Multi-faceted 40° reflector as standard
- White can as standard RAL9016
- UGR<19 and ECA compliant variants
- Suspension option

Options

- DALI dimming – (DA)
- Integral 3hr emergency – (M3)
- Integral self-test 3hr emergency - (STE)
- 2m suspension kit 3 x wires + ceiling plate – (SUS/2M)
- 40° specular reflector – (SP40)
- 50° Satin reflector – (SA50)
- Black can RAL9005 – (BK)
- Grey can RAL9006 – (GY)

Capri – 150

Dimensions

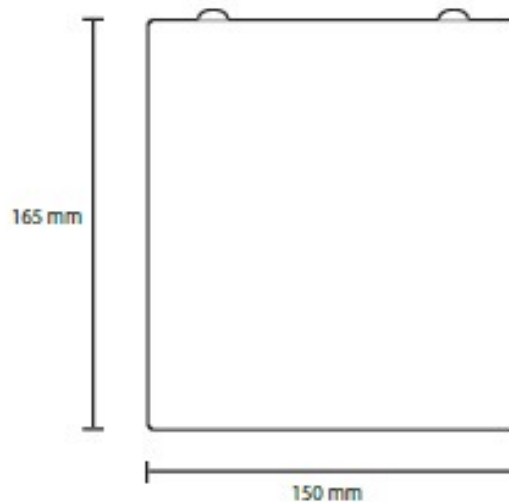

Product Code

C150-8-4K-MF40-WH	Capri 150, 8w, 1,050lm, 4K, white body, multi-faceted reflector
C150-14-4K-MF40-WH	Capri 150, 14w, 1,775lm, 4K, white body, multi-faceted reflector
C150-19-4K-MF40-WH	Capri 150, 19w, 2,400lm, 4K, white body, multi-faceted reflector

**Suffix 4K to 3K for 3000 Kelvin

** Suffix WH to required body colour

** Suffix MF40 with required reflector

** Example – C150-19-4K-MF40-WH-DA

Capri 150, 19w, 2,400lm, white can, 40° multi-faceted reflector & DALI dimming