

Stylish low profile spun aluminium bulkhead c/w opal polycarbonate diffuser.

## Applications

- Corridors
- Stairwells
- Break-Out
- Receptions
- Lobbies
- Classrooms




## Features

- Aluminium spun housing
- Opal UV stabilised polycarbonate diffuser
- Epoxy power coated RAL9016 as standard
- 2 CCT Switchable
- Tridonic Driver
- IP20

## Options

- Integrated 3hr emergency -Standard **(M3)** – Self Testing **(STE)**
- Microwave Sensor **(MW1)**
- Casambi Wireless Control **(BTC)**
- Custom body finishes available on request **(RAL)**

## Dimensions

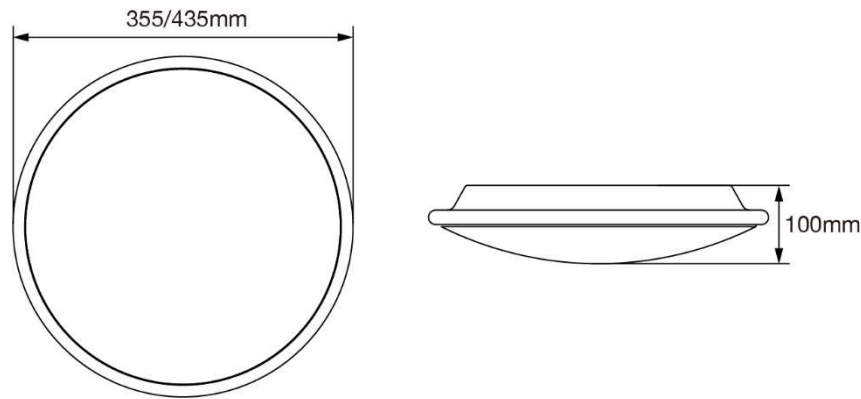

## Product Code

LA-20-CCT-WH      Lancing 20w, 1680lm, 355mm body finished white.

LA-27-CCT-WH      Lancing 27w, 2750lm, 435mm body finished white.

\*\* Suffix WH to RAL for Custom body finish

\*\* Suffix end of code (M3) for emergency facility or (MW1) for Microwave sensor

Example: LA-20-CCT-WH-M3-MW1

Lancing c/w 3hr Emergency and Microwave sensor