

Surface mounted linear with steel base, moulded end caps, hinged opal polycarbonate diffuser

- Classrooms
- Canteens
- Offices
- Hospitals
- Workshop
- Retail




## Features

- Steel Base
- Hinged opal UV stabilised polycarbonate diffuser
- CCT Switchable
- Wattage Selectable
- IP20

## Options

- Integrated 3hr emergency -Standard **(M3)** – Self-Testing Emergency **(STE)**
- Microwave Sensor **(MW1)**
- Casambi Wireless Control **(BTC)**

## Dimensions

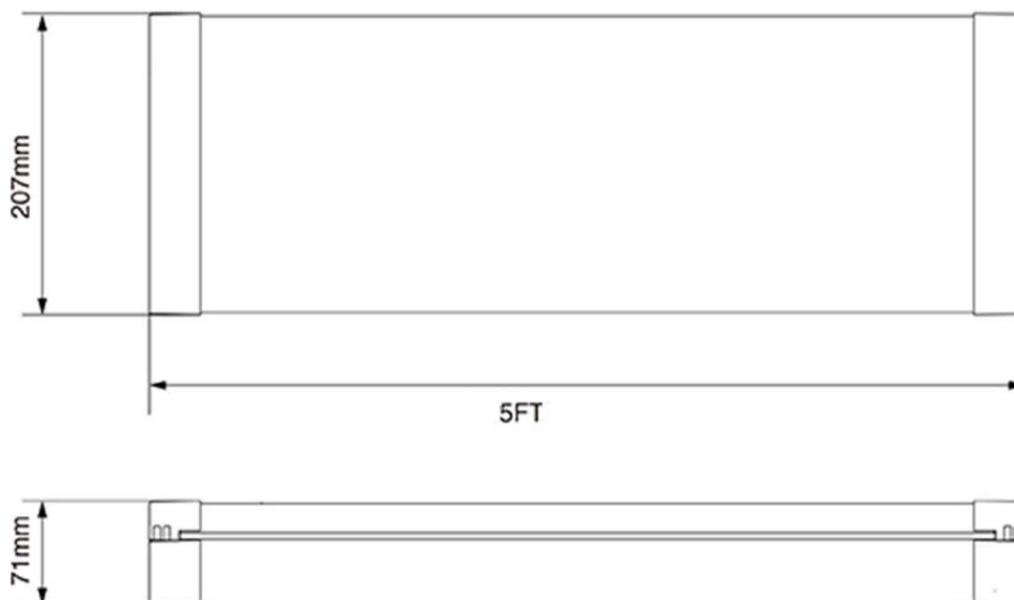

## Product Code

STM-WS-CCT-WH

Stamford, wattage selectable with switchable CCT

|       |       |        |       |       |        |
|-------|-------|--------|-------|-------|--------|
| - 25w | 200mA | 3500lm | - 31w | 250mA | 4450lm |
| - 37w | 300mA | 5530lm | - 45w | 350mA | 6200lm |

\*\* Suffix end of code (**M3**) for emergency facility or (**MW1**) for Microwave Sensor or (**BTC**) for Casambi Wireless Control

Example: STM-WS-CCT-WH-BTC

Stamford c/w Casambi Wireless control