

Surface / Suspended LED, steel base, epoxy powder coated c/w opal diffuser & captive end caps

- Classrooms
- Offices
- Hospitals
- Meeting Rooms
- Workshop




Features

- Steel fabricated body epoxy powder coated all RAL options available
- Stand-alone
- Reeded opal diffuser
- Tridonic LED and driver system for optimum performance
- IK05

Options

- DALI – (DA)
- Casambi wireless bluetooth control (BTC)
- Standard 3hr emergency – (M3)
- DALI monitored emergency – (D3)
- Suspension Kit – (SUS-2M)
- Micro-wave Sensor – (MW1)

Dimensions

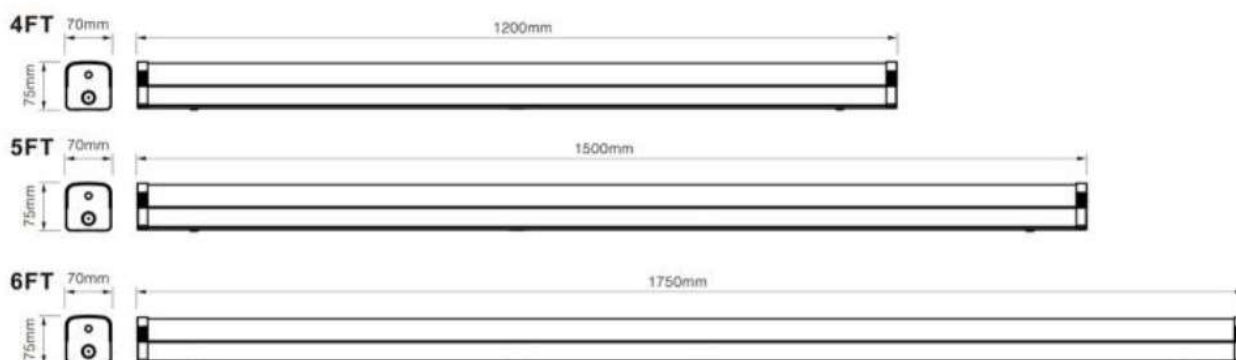

Product Code

DEO-SW-CCT-4F-WH	Defoe 1200mm switchable power 22-40w, 3430-6000lm, CCT 3000-6500K
DEO-SW-CCT-5F-WH	Defoe 1500mm switchable power 34-60w, 5140-9000lm, CCT 3000-5700K
DEO-SW-CCT-6F-WH	Defoe 1800mm switchable power 49-70w, 7350-10500lm, CCT 3000-5700K

** Example: DEO-SW-CCT-4F-WH-BTC**

Defoe 1200mm, switchable power, selectable CCT , c/w Casambi wireless control